GK-2509YS1 / GK-2512AS1 / GK-3009AS1 / GK3012AS1

Specifications

Note Use conditions: The temperature should be between -10 and +45°C. The RH should be less than 90% at room temperature. Any condition outside of this range could result in burnout, deformed, malrotating or damaged parts.

Model	Width of unit (cm)	Power	Fan speed	Air volume (m^3/h) (50/60Hz)	Current (A) (50/60Hz)	Input (W) (50/60Hz)	Air velocity Max. (m/sec) (50/60Hz)	Noise (dB) (50/60Hz)	Starting Current (A)	Weight (kg)
GK-2509YS1	90	Single-phase, 50/60Hz 220-240/220V	High	1,210-1,230/1,170	0.25-0.26/0.29	54-61/63	9.5/9.5	43-44.5/43	0.43	10.5
			Low	980-1,000/930	0.24-0.25/0.25	52-59/54	7/7	38-41/35		
GK-2512AS1	119.4		High	1,420-1,440/1,410	0.35-0.37/0.39	76-83/84	9.5/9.5	46-47/46.5	0.62	13.3
			Low	1,150-1,170/1,090	0.31-0.33/0.33	67-78/71	7/7	40.5-44/38		
GK-3009AS1	90		High	1,450-1,470/1,640	0.43-0.46/0.47	90-105/102	12/12	46-47/49.5	0.86	11.0
			Low	1,100-1,200/1,150	0.35-0.37/0.39	76-87/84	8/8	43-45.5/42.5		
GK-3012AS1	119.4		High	1,740-1,760/1,950	0.52-0.56/0.58	107-125/125	12/12	49-50/52	1.05	14.0
			Low	1,350-1,400/1,330	0.44-0.46/0.48	95-109/104	8/8	46-47/45		

*Specifications may be subject to change without notice.

Dimensions

GK-25,GK-30 type

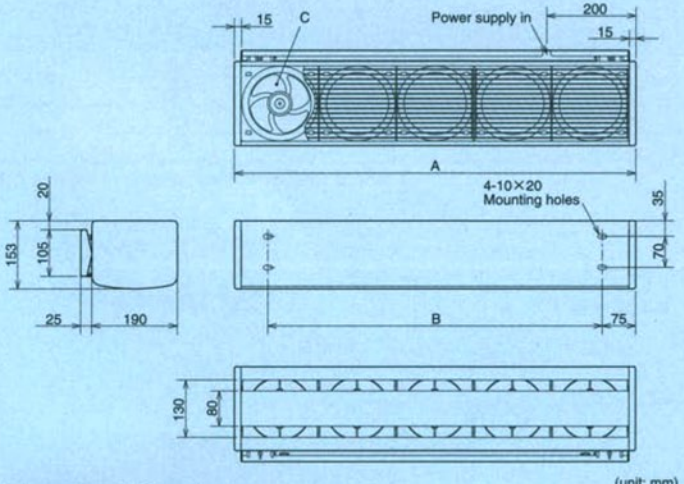

(unit: mm)

Dimensions (unit: mm)

Model	A	B	C
GK-2509YS1	900	750	5
GK-2512AS1	1,194	1,044	6
GK-3009AS1	900	750	5
GK-3012AS1	1,194	1,044	6
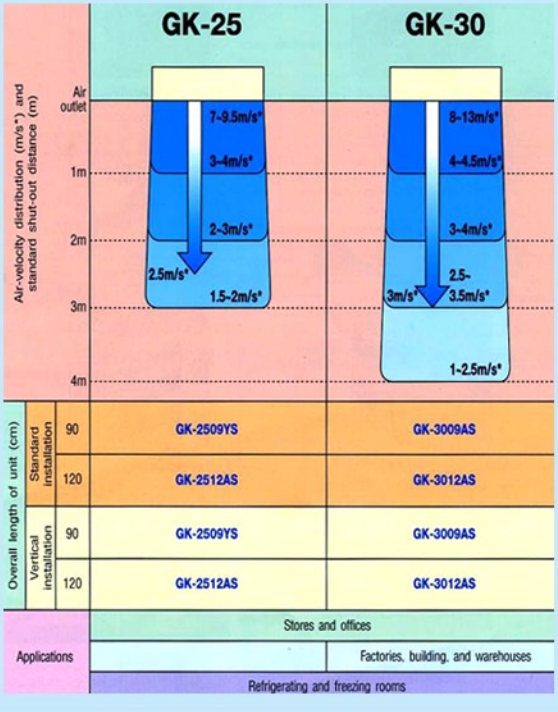
Air Velocity Distribution