

MK-5010T-E / MK-5012T-E

Specifications


Note Use conditions: The temperature should be between -10 and +45°C. The RH should be less than 90% at room temperature. Any condition outside of this range could result in burnout, deformed, malrotating or damaged parts.

Model	Width of unit (cm)	Power	Frequency (Hz)	Air volume (m ³ /h)	Current (A)	Input (W)	Air velocity Max. (m/sec)	Noise (dB)	Starting Current (A)	Weight (kg)
MK-5010T-E	101.8	Three-phase, 50/60Hz 380-440/380V	50	3,950	0.64-0.67	336-368	16	62	2.3	25.5
			60	4,250	0.74	432	17	64	2.0	
MK-5012T-E	126		50	5,000	0.80-0.84	420-460	16	63.5	2.9	32
			60	5,400	0.93	540	17	63.5	2.5	

*Specifications may be subject to change without notice.

Dimensions

MK-50 type

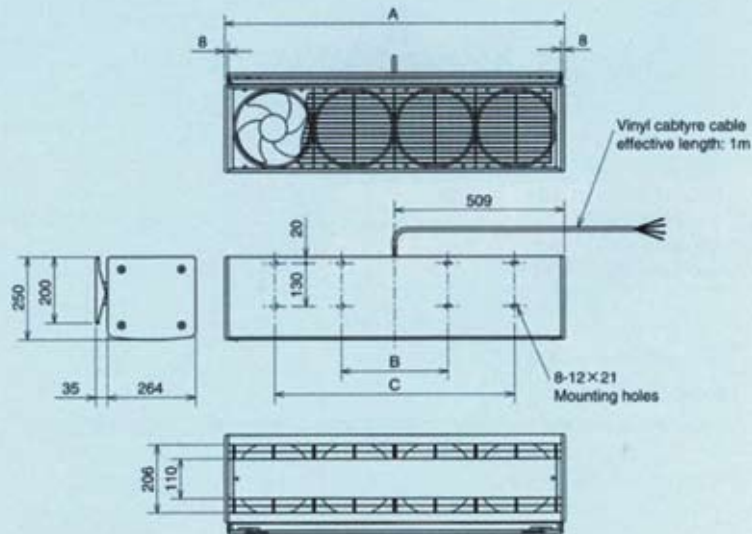

(unit: mm)

Dimensions (unit: mm)

Model	A	B	C
MK-5010T-E	1,018	318	718
MK-5012T-E	1,260	560	960